

FLOOR ONE	
Alexander Law Office, P.L.C.	SUITE 117
AXA Advisors	SUITE 123
Robinson & Associates	SUITE 124
Skiba Financial Consultants	SUITE 129
FLOOR TWO	
H.R. Wickes Foundation	SUITE 202
Lynch Law Group, P.C.	SUITE 209
Prioleau & Associates, P.C.	SUITE 211
FLOOR THREE	
Watson Law Firm, LLC	SUITE 317
Rivers Law Firm	SUITE 323
Ramirez Financial	SUITE 324
Alexander Foundation, LLC	SUITE 329
FLOOR FOUR	
Minh Law Group	SUITE 417
PWR Advisors	SUITE 423
Lee & Associates	SUITE 424
Jackson & Rous Group	SUITE 429
FLOOR FIVE	
Kris Mukherji, APC	SUITE 517



E-INK SIGNAGE DISPLAY 32" EPD320C-IE

32" INDOOR DIGITAL SIGNAGE


EPD320C-IE

Introducing the EPD320C-IE 32 Electronic Paper Display from TeamUC Inc. The TeamUC EPD320C-IE is a high-resolution display with amazing clarity that comes in color. The unit requires minimal power making it versatile for applications across various industries/markets. Like looking at actual paper, the visual output is soothing yet comforting to the eye, eliminating the possibility of eye strain from screen exposure.

TeamUC EPD320C-IE displays are perfectly suited for implementation under various environments such as Menu/Message boards in retail, Directory/Info boards in Healthcare/Medical, Real-time route updates at bus stops, and also for special types of writing such as Calligraphy. You just can't go wrong with the EPD320C-IE from TeamUC.



FEATURES

- Wide Viewing Angle
- Amazing Clarity under the sunlight
- Build-in Battery indicator
- Bi-Directional Data Transmission

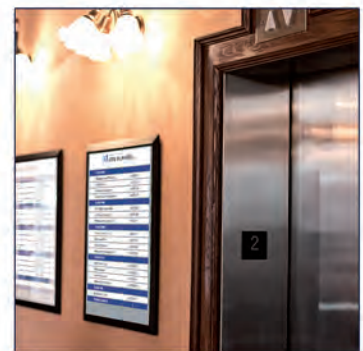

32" EPD INDOOR SIGNAGE

EPD320C-IE

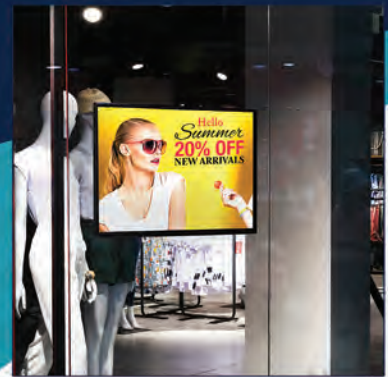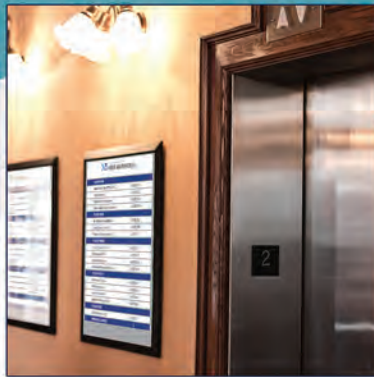

Technical Specifications

Model	EPD320C-IE
Size	32"
Screen Technology	E Ink CF
Resolution	2560 × 1440
Color	4096 Color
Contrast Ratio	13:1
Flash Size	eMMC 8G
DDR	DDR 512MB
G Sensor	For Portrait Mode & Landscape Mode
Button	Power on/off. Reset
Connectivity	Wi-Fi, BT4.1, Ethernet
OS	Android 4.4 or up
Power Type	DC (12V/4A)
Bezel Width	5.7mm/5.7mm/5.7mm/15mm (Left/Right/Top/Bottom)
Mounting	VESA mount 200mmX200mm
External Dimension	703.6 x 410.5 x 8.8mm (With 2mm tempered Glass)
Weight	6.5 Kg/14lb
Operating Temperature	0°C~50°C